
MANUAL STACKERS










Type		Duplex Mast		
Model		**BT 1-X5**	**BT 1-L5**	**B 10.16**
Capacity - **Q**	kg	500		1000
Lower lost height - **h**	mm	85		
Lifting height – **H3**	mm	1600		
Number of pumping to **H3** - Unloaded	-	23	-	24
Number of pumping to **H3** – Normally Loaded	-	56	-	72
Working length - **l**	mm	1120		
Overall length - **L**	mm	1565		1617
Overall width - **B**	mm	700		
Width – **B1**	mm	540		
Height – **H1**	mm	1985		
Overall Height in Maximum Lifting Height - **H4**	mm	1985		
Axle Width - **Ast**	mm	2500		
Turning Radius (max) - **Wa**	mm	1650		
Net Weight	kg	152	121	230

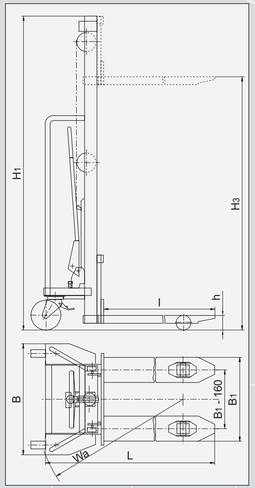




B 10.16

HIGH LIFT HAND PALLET TRUCKS

Type		KT 20H 1.0	KT 20H	KT 20H 2.5	KT 20H 3.0	KTB 10	KTB 10-P
Capacity - **Q**	kg	1000	2000	2500	3000	1000	
Lower lost height - **h**	mm	85					365
Lifting height – **H3**	mm	200				800	1070
Number of pumping to **H3** - Unloaded	-	12				19	
Number of pumping to **H3** - Normally Loaded	-	12				49	
Working length - **l**	mm	1500; 1800	750; 1000; 1120; 1200			750; 1000; 1120	1000
Overall length - **L**	mm	l + 334				1500	1380
Overall width - **B**	mm	540; 685; 950			540	600	
Width – **B1**	mm	540; 685; 950			540		600
Height – **H1**	mm	1253				1280	
Net weight	kg	95				130	150

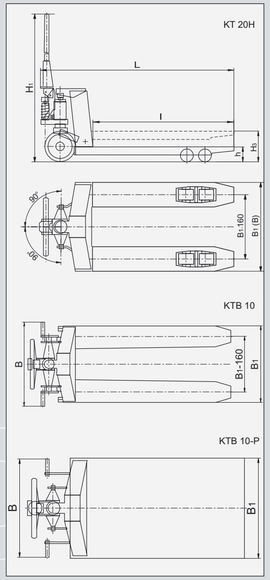



KTB 10

HAND PALLET TRUCKS




KT 20H


SKLADOVA TEHNIKA
25 Sveti Knyaz Boris I St
5100 Gorna Oryahovitsa
Bulgaria

tel.: ++359 618 60576
fax: ++359 618 60190
e-mail: info@st-bg.com
http://www.st-bg.com

MANUAL STACKERS

Type		Duplex Mast		
Model		**B 10.20**	**B 10.25**	**B 10.30**
Capacity – **Q**	kg	1000		
Lower lost height - **h**	mm	85		
Lifting height – **H3**	mm	2000	2500	3000
Number of pumping to **H3** - Unloaded	-	29	36	43
Number of pumping to **H3** - Normally Loaded	-	91	115	139
Working length – **l**	mm	1120		
Overall length – **L**	mm	1617		
Overall width – **B**	mm	800		
Width – **B1**	mm	540		
Height – **H1**	mm	1500	1750	1985
Overall Height in Maximum Lifting Height - **H4**	mm	2460	2960	3450
Aisle Width – **Ast**	mm	2500		
Turning Radius (max) - **Wa**	mm	1650		
Net Weight	kg	290	305	330

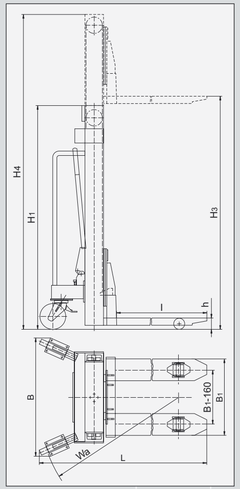


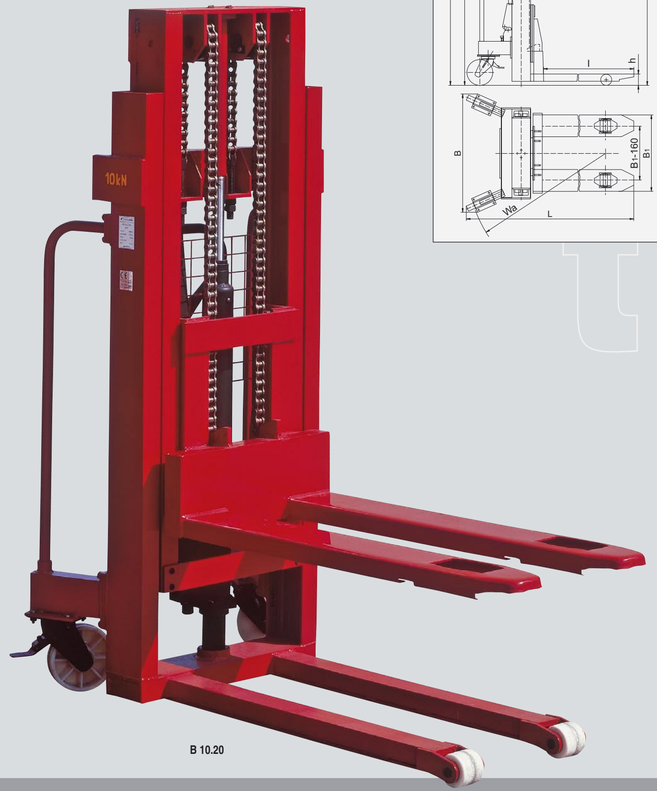

B 10.20

SEMI-ELECTRIC STACKERS


Type		Simplex Mast	Duplex Mast		
Model		**B 10.16-E**	**BT 1-E**	**B 10.20-E**	**B 10.30-E**
Capacity - **Q**	kg	1000			
Lower lost height - **h**	mm	85			
Lifting height – **H3**	mm	1600		2000	3000
Working length - **l**	mm	1120			
Overall length – **L**	mm	1617	1646	1617	
Overall width – **B**	mm	800	850	800	
Width – **B1**	mm	540			
Height – **H1**	mm	1985	1610	1500	1985
Overall Height in Maximum Lifting Height - **H4**	mm	1985	2610	2460	3450
Lifting Speed – Nominal Loaded / Unloaded	m/s	0.11/0.14			
Lowering Speed – Nominal Loaded / Unloaded	m/s	0.10 / 0.10			
Aisle Width – **Ast**	mm	2500	2300	2500	
Turning Radius (max) - **Wa**	mm	1650	1520	1650	
Battery	V/Ah	2 x 12/75		2 x 12/75 or 2 x 12/94	
Lifting Motor Power	kW	1.5			
Battery Charger (220V, 50Hz)	V/A	24 / 6			
Net Weight (Including Battery)	kg	325	410	385	440

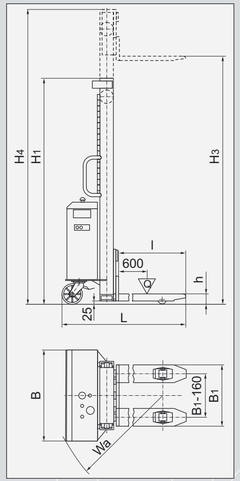




B 10.30-E

FULL ELECTRIC TRUCKS AND STACKERS



Type		Full Electric Pallet Trucks	Full Electric Stackers								
			Simplex Mast	Duplex Mast			Triplex Mast				
Model		**KT 20-EX**	**B 10.16-EX**	**B 10.30-EX**	**B 12.25-EX**	**B 15.25-EX**	**B 20.30-EX**	**B 15.35-TEX**	**B 15.45-TEX**	**B 15.54-TEX**	**B 15.59-TEX**
Capacity – **Q**	kg	2000	1000		1250	1500	2000	1500			
Lower Lost Height - **h**	mm		85					90			
Lifting Height – **H3**	mm	200	1600	3000	3500	2500	3000	3500	4000	4500	5400	5800
Working Length - **l**	mm		1120								
Overall Length – **L**	mm	1760	1800			1910					
Overall Width – **B**	mm		870								
Width – **B1**	mm		540					560			
Height – **H1**	mm	-	1890	1990	2250	1780	2030	1695	1865	2030	2330	2480
Overall Height in Maximum Lifting Height- **H4**	mm	-	2010	3450	3962	2992	3492	3980	4490	4984	5885	6285
Travelling Speed – Nominal Loaded/Unloaded	km/h		4.0/4.0			4.0/5.0				4.5/5.5	
Lifting Speed Nominal Loaded/Unloaded	m/s	0.05/0.07	0.11/0.14			0.08/0.11					
Lowering Speed – Nominal Loaded/Unloaded	m/s	0.05	0.10			0.11					
Aisle Width – **Ast**	mm	-	2250			2300					
Turning radius (max) - **Wa**	mm	1552	1550			1600					
Maximal Overcame Slope – Nominal Loaded/Unloaded	%	5/10									
Battery	V/Ah	24/165								24/240	
Travelling Motor Power (S2-60min)	kW	1.2	0.70		1.2					1.7	
Lifting Motor Power	kW	1.5			2.0						
Battery Charger (220V, 50Hz)	V/A	built 24/30 or external 24/40									
Net Weight (Including Battery)	kg	380	520	620	650	780	830	950	990	1030	1260	1290



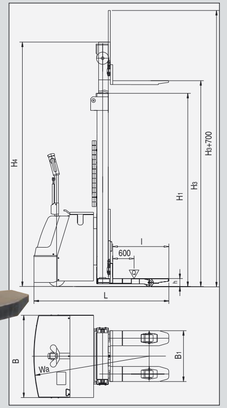

B 15.54-TEX

SKLADOVA TEHNIKA

tehnika

LJK® 2/2007 www.likotehnika.com